

B220PXE

Compact VV 21,6 m

EN



The GSR B220PXE platform integrates the double “up-and-over” articulation with an innovative telescopic boom and end mounted basket.

Simple to use, this machine, allows overcome obstacles and reach inaccessible areas until now, without using more complex machinery.

Rigid, easy and technologically advanced, this machine has a length in running order of 6,64 metres only that allows to reach the remarkable outreach of 11,25 metres with 120 kg in the basket, while keeping the stabilization “in shape”.



GSR
AERIAL PLATFORMS



www.gsrspa.it

- End mounted basket for precision work (roofs, solar panels, balconies, etc.) which lowers the cage flat to the ground
- "In shape" stabilization
- Up and over with 11,25 meters of outreach and 120 kg of capacity in the basket
- Balanced and controlled swing of the articulation, making operations easier and safer
- 360° rotation without restrictions with 250 kg in the basket up to the maximum height.
- Simple and intuitive controls
- Advanced security systems, precise and immediate in use
- Light weight but robust structure
- Compact and balanced on the road like a normal car
- Easy and intuitive, ideal for self-drive





B220PXE COMPACT VV_VEN052023

Model	Working Height (m)*	Max. Outreach (m)*	Basket Capacity (kg)	Turret Rotation (°)	Basket Rotation (°)	GVW min. (to)*
B220PXE Compact VV	21,6	11,25/8,30	120/250	450	90 + 90	3,5

* Depending on the vehicle

B220PXE Compact VV

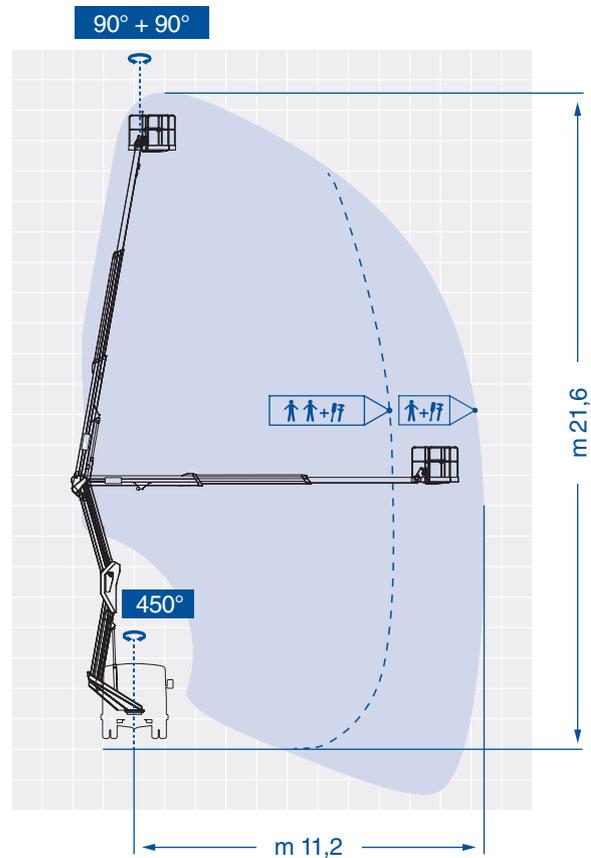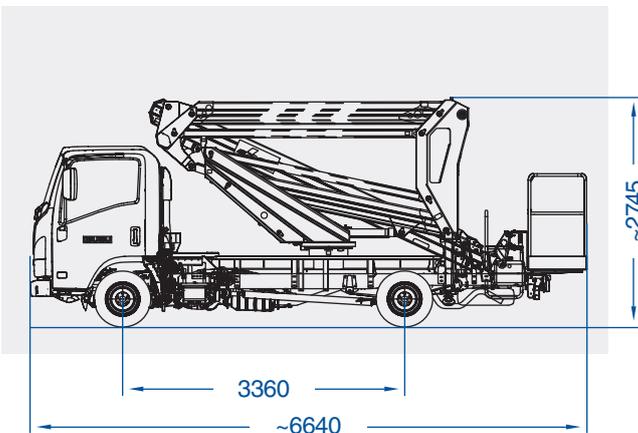

GSR SpA adopts a policy of continuous improvement. The displayed specifications are indicative and subject to modifications without prior note.